


# niglon

Industrial Accessories



## 16116 IP44 Compact Wall Mounted Interlocking Switched Socket

### Technical Drawing

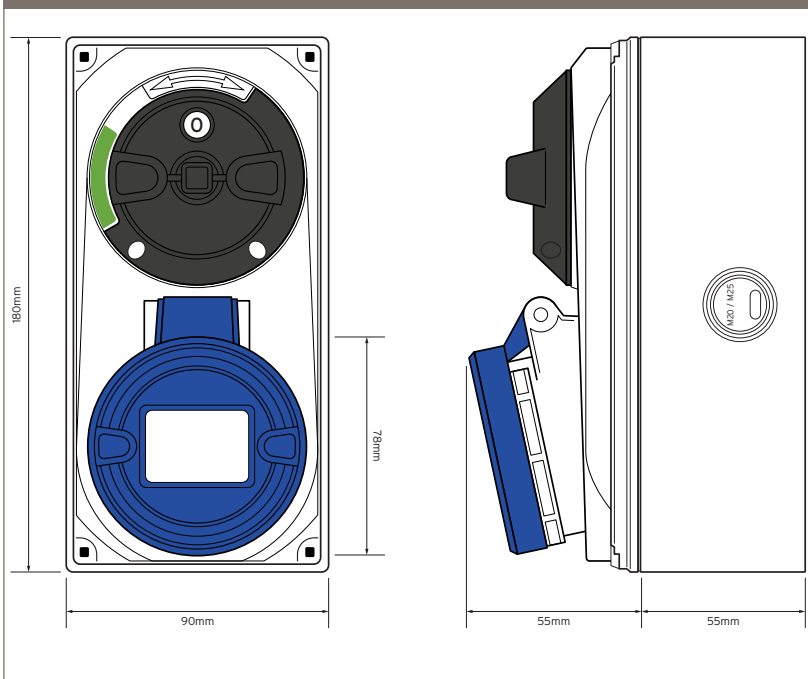

### Technical Specifications

|                   |  |
|-------------------|--|
| Housing Material  | PA6 - PC/ABS   |
| Contacts          | Nickel-plated contacts   |
| Cable Entry       | Rear entry: M20/M25 and M25/M32<br>Side entry: (left and right) M20/M25<br>Top entry: M25/M32<br>Bottom entry: M20/M25 |
| Amps              | 32A  |
| Volts             | 230V   |
| Pin Configuration | 3P   |
| IP Rating         | IP44   |
| Wire Flexible     | 2.5-6mm <sup>2</sup>   |
| Wire Solid        | 2.5-10mm <sup>2</sup>  |
| Weight            | 665g   |
| Standards         | BS EN 60309-1&2, EN 60947-3  |
| Certified         | OVE & CE   |
| Dimensions        | 180mm H x 90mm W x 110mm D   |

