

Firestay 5/7W LED CCT Dimmable Wattage Switchable Downlight with Tool Free Termination

Part Code: 10510v2

Our flagship downlight has received a major facelift. The Firestay CCT now includes a 4-way colour switch and 2-way wattage switch as standard. With an upgraded 10-year warranty, the new Firestay CCT is truly a fit and forget market leading downlight.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems
- IP65
- Front CCT/Wattage Switch
- Mains Dimmable as standard
- Compatible with most branded Trailing Edge Dimmers, including the BELL Smart Universal LED Trailing/Leading Edge Dimmer Module Code: 10803



Changeable
Bezels



**Colour
Temperature**
Options



IP65
Rating



Wattage
Switchable

FirestayLED

CCT 3 way selectable colour switch



Product Category Fittings / Downlights

Application LED Downlights

Product Warranty 10 Years

EAN 5013588900018

Commodity Code 9405423990


Country of Origin CN

Technical Specification

Wattage (W)	5/7
Volts (V)	220/240
Colour Temperature (K)	2700/3000/4000/6000
Lumen Output (lm)	5W = 684 (2700K) / 712 (3000K) / 793 (4000K) / 746 (6000K) - 7W = 1048 (2700K) / 1115 (3000K) / 1010 (4000K) / 970 (6000K)
Lumens per Watt (lm/W)	137-159
Candelas	550-720
CRI (ra)	85
Frequency (Hz)	50/60
Life Hours	70000
Switching Cycles	100000
IK Rating	IK07
IP Rating	IP65

Packaging Information

Height (mm)	45
Diameter (mm)	82
Individual Product Weight (kg)	0.215
Inner Box Qty	10
Inner Box Height (mm)	455
Inner Box Width (mm)	210
Inner Box Depth (mm)	95
Inner Box Weight (kg)	3.18
Inner Box Volume	0.00908
Outer Box Qty	20
Outer Box Height (mm)	465
Outer Box Width (mm)	220
Outer Box Depth (mm)	205
Outer Box Weight (kg)	6.42
Outer Box Volume	0.02097
Plastic Packaging Weight (kg)	0.035
UNSPSC Code	39111515

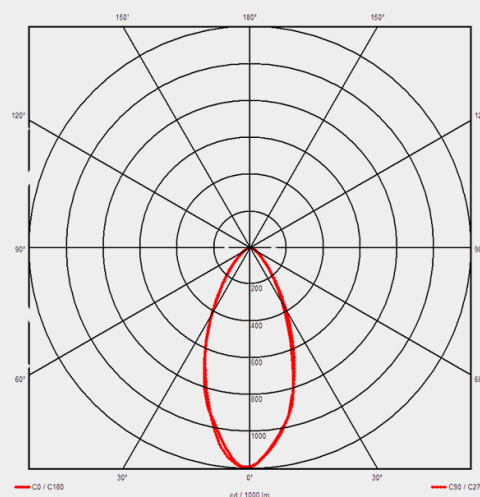

FirestayLED

CCT 3 way selectable colour switch

Additional Information

Beam Angle

60°